



# Test Report

No.: T32020240434SN

Date: MAY 18, 2020

Page 1 of 6

ZHANGPU TONGBAO INDUSTRY & TRADE CO., LTD  
MANAGEMENT AREA OF FIELD DEPARTMENT, DANANBAN TOWN, ZHANGPU COUNTY,  
ZHANGZHOU CITY, FUJIAN PROVINCE, CHINA

The following samples were submitted and identified on behalf of the client as:

## DISPOSABLE PROTECTIVE MASK

SGS Case No. : CA320202422819  
 Style / Item No. : TB-01  
 Ref. No : CP20-014856  
 Lot No. / Batch Code : NOT PROVIDED  
 Sample Description : BLUE MASK  
 Quantity Submitted : 100 PCS.  
 Manufacturer : ZHANGPU TONGBAO INDUSTRY & TRADE CO., LTD  
 Country of Origin : CHINA  
 Country of Destination : UNITED STATES  
 Sample Receiving Date : APR 20, 2020  
 Test Performing Date : APR 20 TO MAY 18, 2020

Test Requested : Please refer to the result summary.

Test Method & Results : Please refer to next page(s).

Result Summary :

Test Requested	Result Summary
ASTM F2100-19 Standard Specification for Performance of Materials Used in Medical Face Masks	See Result

\*\*\*\*\*

Signed for and on behalf of  
SGS Hong Kong Ltd.

Au Kam Chi, Gigi  
Technical Manager

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.



**ASTM F2100-19 Standard Specification for Performance of Materials Used in Medical Face Masks**

Scope : This specification covers testing and requirements for materials used in the construction of medical face masks that are used in providing healthcare services such as surgery and patient care. This specification provides for the classification of medical face mask material performance.

Number of Specimen : 100 pcs of complete product

<u>Clause</u>	<u>Test Items/requirement</u>	<u>Test Result Summary</u>
<u>5</u>	<u>Classification</u>	See Table 1
<u>6</u>	<u>Requirements</u>	
6.1	The properties of the medical face mask material shall conform to the specifications requirements in Table 1, as tested in accordance with Section 9. Bacterial filtration efficiency (ASTM F2101) Differential pressure (EN 14683:2019 Annex C) Sub-Micron Particulate Filtration (ASTM F2299) Resistance to penetration by synthetic blood (ASTM F1862)	> 98% < 6.0 mm H <sub>2</sub> O/cm <sup>2</sup> > 98% Penetration not seen at 120 mm Hg
6.2	Flammability 16 CFR Part 1610	Class 1

Table 1 Medical Face Mask Material Requirements by Performance Level

Characteristics	Level 1 Barrier	Level 2 Barrier	Level 3 Barrier
Bacterial filtration efficiency, %	≥ 95	≥ 98	≥ 98
Differential pressure, mm H <sub>2</sub> O/cm <sup>2</sup>	< 5.0	< 6.0	< 6.0
Sub-micron particulate filtration efficiency at 0.1 micron, %	≥ 95	≥ 98	≥ 98
Resistance to penetration by synthetic blood, minimum pressure in mm Hg for pass result <sup>#</sup>	80	120	160
Flame spread	Class 1	Class 1	Class 1

# - An acceptable quality limit of 4,0 % is met for a single sampling plan when 29 or more of the 32 tested specimens show “pass” results.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

## Test Report

No.: T32020240434SN

Date: MAY 18, 2020

Page 3 of 6

### Result 1 Bacterial filtration efficiency ASTM F2101-19

Test Side : White Side  
 Pre-Conditioning : Minimum of 4 hours at 21±5°C and 85±5% R.H.  
 Dimensions of test specimen : ~ 170 mm x 160 mm  
 BFE Test Area : 40 cm<sup>2</sup>  
 BFE Flow Rate : 28.3 l/min  
 Test bacteria : Staphylococcus aureus ATCC 6538  
 Mean Particle Size : 2.8 μm  
 Positive Control Average : 2.9 x 10<sup>3</sup> CFU  
 Negative Monitor Count : < 1 CFU

Test Specimen	Percent BFE (%)
1	99.9
2	99.8
3	99.8
4	99.8
5	99.8

### Result 2 Differential pressure EN14683:2019+AC:2019 Appendix C

Test Side : White Side  
 Pre-Conditioning : Minimum of 4 hours at 21±5°C and 85±5% R.H.  
 Dimensions of test specimen : ~ 170 mm x 160 mm  
 Flow Rate : 8 l/min

Test Specimen	ΔP (mm H <sub>2</sub> O/cm <sup>2</sup> )	ΔP (Pa/cm <sup>2</sup> )
1	4.0	39.4
2	4.3	42.5
3	4.1	40.3
4	4.3	41.9
5	4.2	41.6

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

## Test Report

No.: T32020240434SN

Date: MAY 18, 2020

Page 4 of 6

### Result 3 Sub-Micron Particulate Filtration ASTM F2299/F2299M-03 (Reapproved 2017)

Test Side : Blue Side  
 Pre-Conditioning : Minimum of 4 hours at 21±3°C and 30-50±5% R.H.  
 Test Condition : 23 °C and 23% R.H.  
 Test Area : 91.5 cm<sup>2</sup>  
 Particle Size : 0.1 μm  
 Average Filtration Efficiency : 98.72%  
 Standard Deviation : 0.69

Test Specimen	Test Article Counts	Average Control Counts	Filtration Efficiency (%)
1	92	12,309	99.25
2	208	12,144	98.3
3	280	11,953	97.7
4	92	11,798	99.22
5	101	11,776	99.14

### Result 4 Resistance to penetration by synthetic blood ASTM F1862/F1862M-17

Test Side : Blue Color (Outside)  
 Pre-Conditioning : Minimum of 4 hours at 21±5°C and 85±5% R.H.  
 Test Condition : 20.5 °C and 22% R.H.  
 Test Pressure : 120 mmHg  
 No of Test Specimen Tested : 32  
 No of Test Specimen Passed : 32

Test Specimen #	Synthetic Blood Penetration
1-32	None Seen

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.



## Test Report

No.: T32020240434SN

Date: MAY 18, 2020

Page 5 of 6

Result 5 Flammability Test of Clothing Textiles (16 CFR Part 1610 - October 20, 2008 Edition)

Sample : Fabric cut from submitted sample  
Fabric Surface : Plain (Face)  
Test Specimen Direction : Length

<b>As Received</b>		
	<u>Flame Spread (sec.)</u>	<u>Burn Code</u>
(1)	--	IBE
(2)	--	IBE
(3)	--	IBE
(4)	--	IBE
(5)	--	IBE
<b>Flammability Classification:</b>		Class 1
<b>Requirement:</b>		Class 1

### Remarks:

- Class 1 – Normal Flammability**  
Class 1 textiles exhibit normal flammability and are acceptable for use in clothing.  
Test Criteria for plain surface textile fabric:  
(A) There are no burn times; or  
(B) There is only one burn time and it is equal to or greater than 3.5 seconds; or  
(C) The average burn time of two or more specimens is equal to or greater than 3.5 seconds.
- Disposable fabrics and garments shall not apply to be refurbished before testing.

### Burn Code Description:


IBE = Ignited, but extinguished

Note : All the test results except Flammability test contained in this Test Report was conducted by a SGS assessed competent subcontractor laboratory

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

**Photo Appendix**

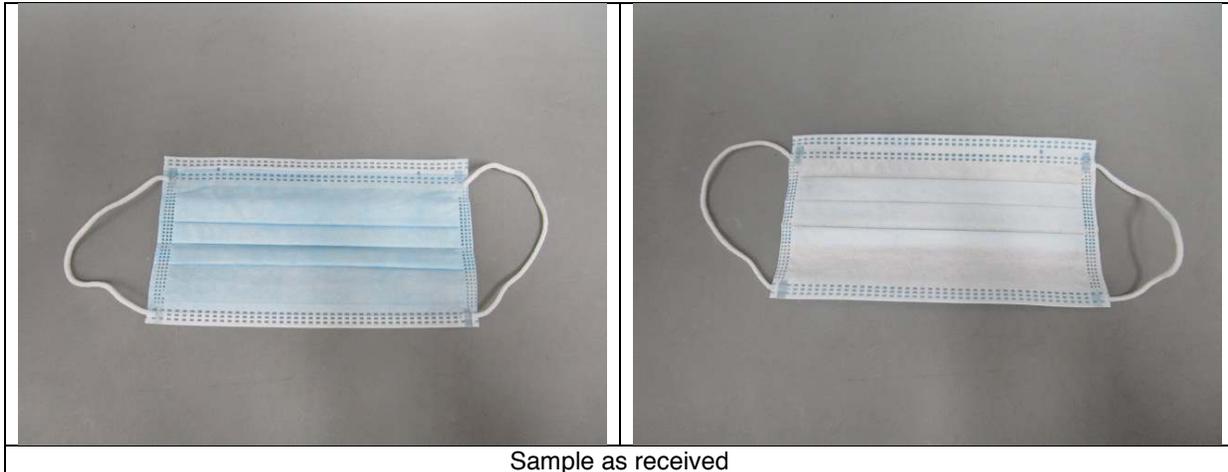

Sample as received

\*\*\* End of Report \*\*\*

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.